

# A01 SERIES

## KEYLOCK SWITCHES

Panel cut-out .630" (16mm)


**A keylock switch assembly requires:**

**Operator + Switchblock**




To order, select desired model numbers from tables below.

**Example:** Rectangular keylock switch, single pole, 2 positions maintained = **A018101 and A0151B**

Switches are normally shipped unassembled. Consult factory if factory assembly is required.



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

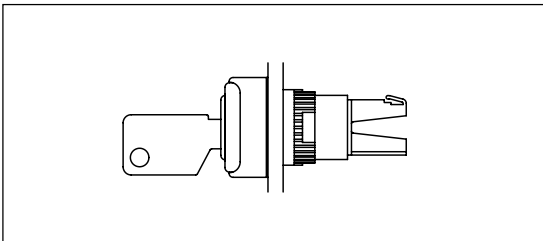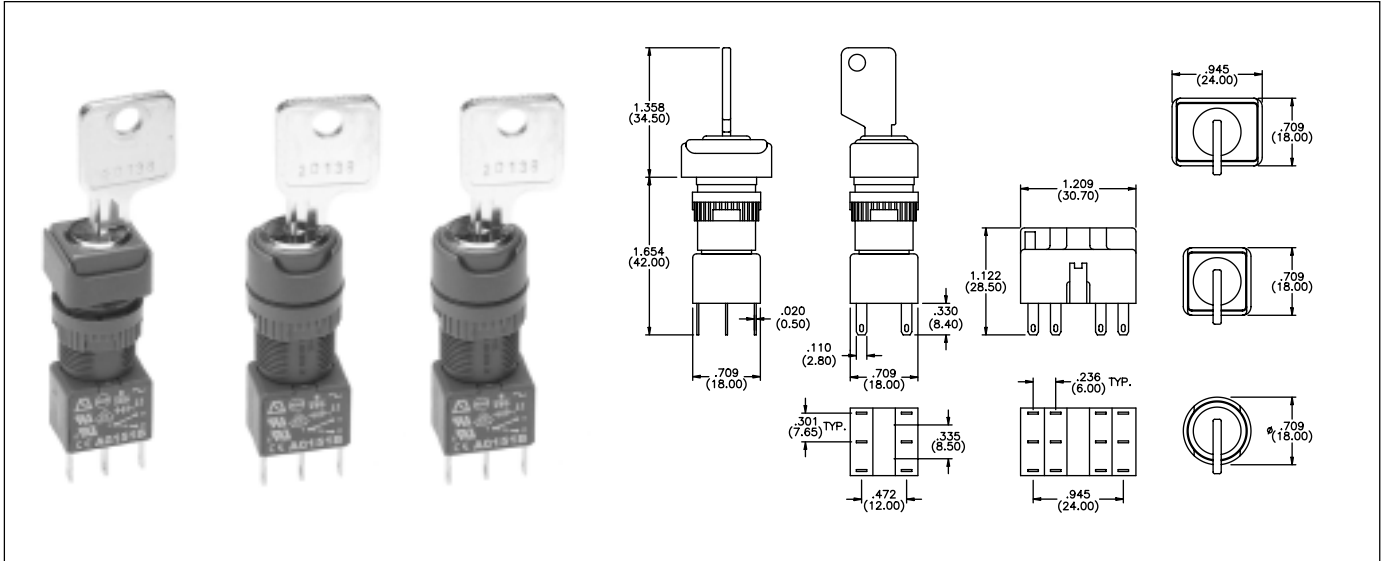


### OPERATOR

Poles	Bezel	Description	Part no.	Key removable
1 or 2	■	2 pos, maintained	<b>A018101</b>	A - C
1 or 2	■	2 pos, momentary	<b>A018102</b>	A
3 or 4	■	2 pos, maintained	<b>A018103</b>	A - C
3 or 4	■	2 pos, momentary	<b>A018104</b>	A
1 or 2	■	3 pos, maintained	<b>A018105</b>	A - B - C
1 or 2	■	3 pos, momentary	<b>A018106</b>	A
1 or 2	■	3 pos, mainB, momC	<b>A018107</b>	A - B
1 or 2	■	3 pos, mainC, momB	<b>A018108</b>	A - C
1 or 2	■	2 pos, maintained	<b>A018201</b>	A - C
1 or 2	■	2 pos, momentary	<b>A018202</b>	A
3 or 4	■	2 pos, maintained	<b>A018203</b>	A - C
3 or 4	■	2 pos, momentary	<b>A018204</b>	A
2	■	3 pos, maintained	<b>A018205</b>	A - B - C
2	■	3 pos, momentary	<b>A018206</b>	A
2	■	3 pos, mainB, momC	<b>A018207</b>	A - B
2	■	3 pos, mainC, momB	<b>A018208</b>	A - C
1 or 2	●	2 pos, maintained	<b>A018301</b>	A - C
1 or 2	●	2 pos, momentary	<b>A018302</b>	A
3 or 4	●	2 pos, maintained	<b>A018303</b>	A - C
3 or 4	●	2 pos, momentary	<b>A018304</b>	A
2	●	3 pos, maintained	<b>A018305</b>	A - B - C
2	●	3 pos, momentary	<b>A018306</b>	A
2	●	3 pos, mainC, momB	<b>A018307</b>	A -

### SWITCH BLOCK

No. of poles	Part no.
Single pole	<b>A0151B</b>
Double pole	<b>A0152B</b>
Three pole	<b>A0155B</b>
Four pole	<b>A0153B</b>

### KEY POSITIONS

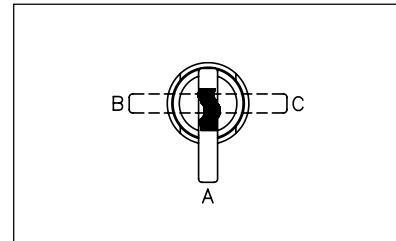

### Key rotation - 2 position switches

The model numbers shown are for switches with counterclockwise key rotation. For clockwise rotation, replace:

- 01** with **25**
- 02** with **24**
- 03** with **27**
- 04** with **28**

at the end of model number.

2 standard keys are supplied.  
20 key barrel types available from stock.

**FOR UNSEALED SWITCHES (IP40):**  
Add '01' to end of **OPERATOR** model number.

**NON-REMOVABLE KEY POSITIONS:**  
**Contact factory.**

Bezel: ■ rectangular ■ square ● round 'pos' - position 'mainB' - maintained position B 'momC' - momentary position C