



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
7/16/10	С	REDRAWN AND UPDATED MATERIAL NOTES	T.B.	B.S.	
8/31/12	D	ADDED DIM. Ø3.00 AND Ø4.30	T.B.	B.S.	



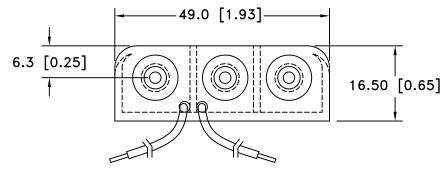

## NOTES:

## 1. MATERIAL:

HOUSING: POLYPROPYLENE

FLAMMABILITY RATING: UL94 HB, UL FILE NO. E216959

TEMPRATURE RANGE: -10°C TO +100°C

RIVETS: BRASS, NICKLE PLATED.

SPRING: SPRING STEEL, NICKLE PLATED.

CONTACT RESISTANCE; UNDER 50m Ω FOR ± CONTACTS PER

EIA-540J000

**ROHS COMPLIANT** 

Tolerance	MPD Memory Protection Devices, Inc						
(Except as noted)	200 Broad Hollow Road, Farmingdale, New York 11735						
decimal			Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional	Title THREE "AA" CELL HOLDER						
± .8 (.030)							
Angular	Date	Drawing Nu	mber				
± 3°	08/31/12	BC3AAW					