


-	36.5

		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A3	-	RELEASE NEW DWG FORMAT	10/18/13	JARRY	-

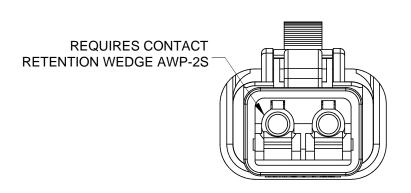

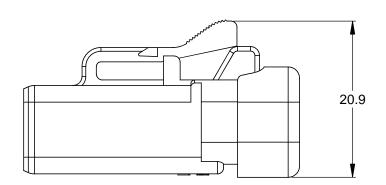

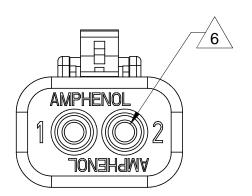

NOTES: UNLESS OTHERWISE SPECIFIED


MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER

2. MODIFICATIONS: END CAP


- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 25 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: ATP04-2P* RECEPTACLE. (* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
12	3.40 mm (.134 in)	4.95 mm (.195 in)	10 - 14 AWG

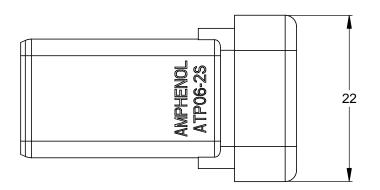

PART NUMBER CHART			
COLOR	PART NUMBER		
GREY	ATP06-2S-EC01		
BLACK	ATP06-2S-EC01BK		

STANDARD MOLDED COLOR IS GREY. ADDITIONAL COLOR (BLACK) IS AVAILABLE VIA SPECIAL ORDER.

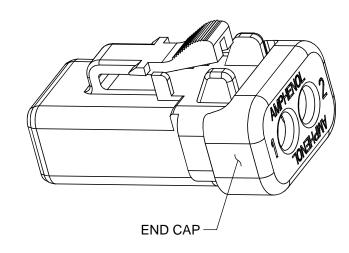

PLUG, 2 SOCKET, END CAP ATP SERIES

ATP06-2S-EC01XX REV: A3 SH:

	SEE PART NUMBER CHART						
	PART NUMBER			DESCRIPTION			ITEM
QUANTITY	QUANTITY MATERIALS LIST						
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64 2 PL DEC ±0.15 3 PL DEC ±0.08 Angles ±1° 3) Note reference = X		SIGNATURE	S DATE	Amphonol			
		DRAWN: JARRY	10/18/13	Amphenol			
		CHECKED:		Sine Systems - www.amphenol-sine.com			
		ENGINEER:		44724 Morley Drive			
MATERIAL SPECIFICA	MATERIAL SPECIFICATIONS:			Clinton Township, MI 48036			
WATERIAL OF LOW TO NO.		CUSTOMER:	· · ·	PLUG, 2	SOCKET,END CAF	P, ATP SERI	ES
PROCESS SPECIFICATIONS:		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL		SIZE TYPE C-	ATP06-2S-E		A3
NEXT ASS'Y:				SCALE: NONE		SHEET 1 O	F 1