
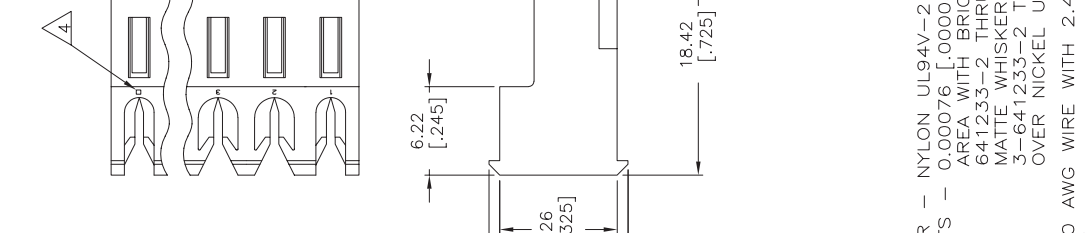


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		REVISONS		DATE		DWN		APD	
LOC	DIST	P	UNK	DESCRIPTION		L		ECO-07-012872	
CM	00							15/JUN/07	
								KW	
								DB	

95.10	[3.744]	24	5-641233-4
91.14	[3.588]	23	5-641233-3
87.17	[3.432]	22	5-641233-2
83.21	[3.276]	21	5-641233-1
79.25	[3.120]	20	5-641233-0
75.29	[2.964]	19	4-641233-9
71.32	[2.808]	18	4-641233-8
67.36	[2.652]	17	4-641233-7
63.40	[2.496]	16	4-641233-6
59.44	[2.340]	15	4-641233-5
55.47	[2.184]	14	4-641233-4
51.51	[2.028]	13	4-641233-3
47.55	[1.872]	12	4-641233-2
43.59	[1.716]	11	4-641233-1
39.62	[1.560]	10	4-641233-0
35.66	[1.404]	9	3-641233-9
31.70	[1.248]	8	3-641233-8
27.74	[1.092]	7	3-641233-7
23.77	[.936]	6	3-641233-6
19.81	[.780]	5	3-641233-5
15.85	[.624]	4	3-641233-4
11.89	[.468]	3	3-641233-3
7.92	[.312]	2	3-641233-2
95.10	[3.744]	24	2-641233-4
91.14	[3.588]	23	2-641233-3
87.17	[3.432]	22	2-641233-2
83.21	[3.276]	21	2-641233-1
79.25	[3.120]	20	2-641233-0
75.29	[2.964]	19	1-641233-9
71.32	[2.808]	18	1-641233-8
67.36	[2.652]	17	1-641233-7
63.40	[2.496]	16	1-641233-6
59.44	[2.340]	15	1-641233-5
55.47	[2.184]	14	1-641233-4
51.51	[2.028]	13	1-641233-3
47.55	[1.872]	12	1-641233-2
43.59	[1.716]	11	1-641233-1
39.62	[1.560]	10	1-641233-0
35.66	[1.404]	9	641233-9
31.70	[1.248]	8	641233-8
27.74	[1.092]	7	641233-7
23.77	[.936]	6	641233-6
19.81	[.780]	5	641233-5
15.85	[.624]	4	641233-4
11.89	[.468]	3	641233-3
7.92	[.312]	2	641233-2

DIM A		NO OF CIRCUITS		PART NO	
DIM A		NO OF CIRCUITS		PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		TYCO ELECTRONICS		Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		D. CLARK		Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		108-1051		MTA-156 CONNECTOR ASSEMBLY,	
0 PLG ±		114-1020		20 AWG, STANDARD	
1 PLG ±		114-1020		RESTRICTED TO	
2 PLG ±		114-1020		A2 00779 ©=641233	
3 PLG ±		114-1020		SCALE 4:1	
4 PLG ±		114-1020		SHEET 1 OF 1	
ANGLES ±		114-1020		REV	
FINISH		114-1020		REV	
MATERIAL		114-1020		REV	

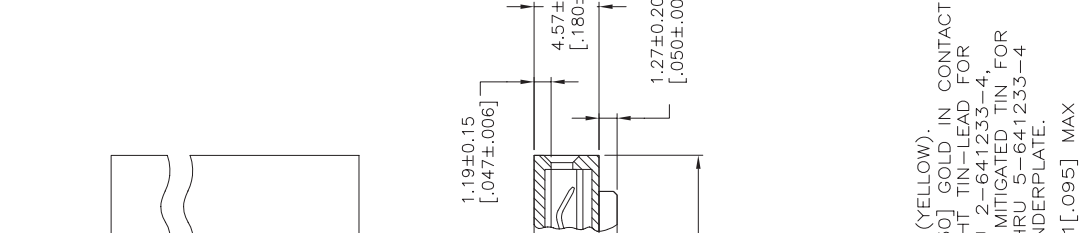

- 1. MATERIAL: CONNECTOR - NYLON UL94V-2 (YELLOW). CONTACTS - 0.00076 [.000030] GOLD IN CONTACT AREA WITH BRIGHT TIN-LEAD FOR 641233-2 THRU 2-641233-4; MATTE WHISKER MITIGATED TIN FOR 3-641233-2 THRU 5-641233-4 OVER NICKEL UNDERPLATE.
- 2. CONTACTS ACCEPT 20 AWG WIRE WITH 2.4[.095] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 4. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5. HOUSING FEATURES ARE: FEED-THRU WITHOUT LOCKING RAMP.

