


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
7/16/10	В	REDRAWN AND UPDATED MATERIAL NOTES	T.B.	B.S.	

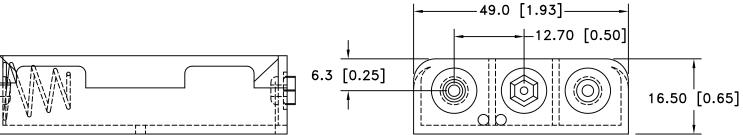

## NOTES:

## 1. MATERIAL:

**HOUSING: POLYPROPYLENE** 

FLAMMABILITY RATING: UL94 HB, UL FILE NO. E216959

TEMPRATURE RANGE: -10°C TO +100°C

RIVETS: BRASS, NICKLE PLATED.

SPRING: SPRING STEEL, NICKLE PLATED.

CONTACT RESISTANCE: UNDER 50m  $\Omega$  FOR  $\pm$  CONTACTS PER

EIA-540J000

**ROHS COMPLIANT** 

Tolerance	Mem	Memory Protection Devices, Inc					
(Except as noted)		•					
	200 Broad Hollow Road, Farmingdale, New York 11735						
decimal			Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional	Title						
± .8 (.030)	THREE	E "AA" CELL HOLDER					
Angular	Date	Drawing Number					
± 3°	7/16/10	BC3AASF					