GPS Active Internal Patch

APAM1368YB13V3.0



RoHS/RoHS II compliant



MSL level: Not Applicable

FEATURES:

- Compact Size
- Easy to Install
- RoHS Compliant

TYPICAL APPLICATIONS:

- Automotive Navigation, Marine buoys
- Personal Tracking
- Surveying equipment, Cell phone, Laptop
- Healthcare and medical monitoring devices, PND, PDA

> STANDARD SPECIFICATIONS:


Antenna

Parameters	Min.	Тур.	N.	Iax.	Units	Note
Center Frequency	157	1575.42±1.02			MHz	
Bandwidth	5				MHz	
Gain		1.0			dBic	(Peak gain on70*70mm Ground Plane facing Zenith.)
VSWR @ Center Frequency		1.5				
Polarization Model		RHCP				(Right Hand Circular Polarization)
Impedance		50			Ω	
Working Temperature	-25			+72	°C	
Storage Temperature	-45			85	°C	


Low Noise Amplifier (LNA)

Parameters	Min.	Typ.	Max.	Units	Note
Center Frequency	1	1575.42±1.02			
DC Voltage	2.70		3.30	V	
Gain		19		dB	(Without cable +25°C± 10°C)
Output VSWR		1.5			
Noise Figure		1.3			(+25°C± 10°C)
DC current		3.5		mA	(At 3.0V)

SMITH CHART

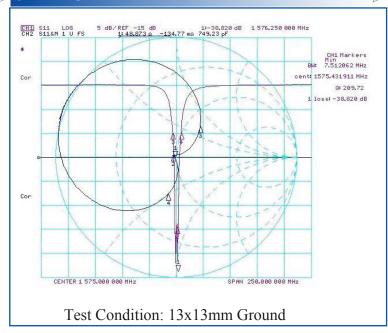

◯ GPS LNA GAIN PLOT

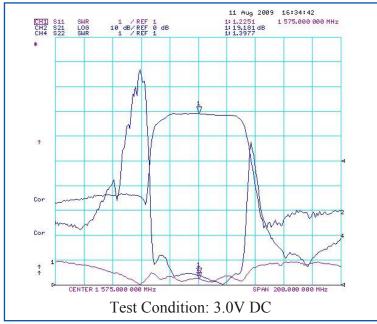






GPS Active Internal Patch

APAM1368YB13V3.0


RoHS/RoHS II compliant





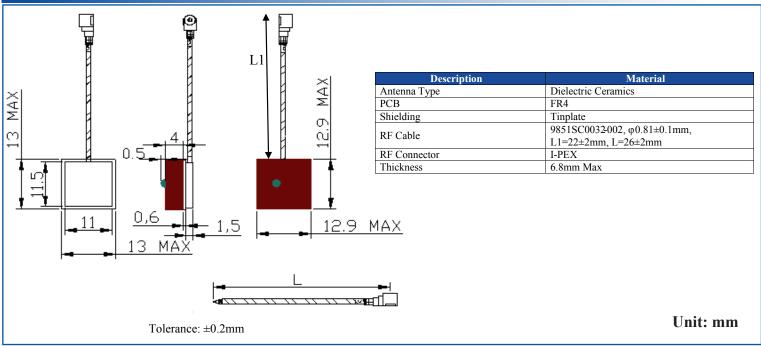

PACKAGING

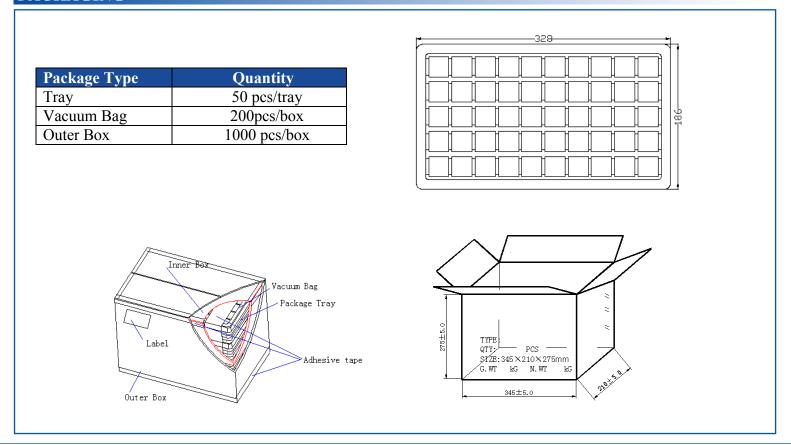

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



