


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POST PLATING: .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST.
- 5 HOUSING: LCP, COLOR-BLACK.
- 6 POST MATERIAL: COPPER ALLOY.
- 7 PACKAGED IN TAPE AND REEL PER EIA-481 SPECIFICATION.

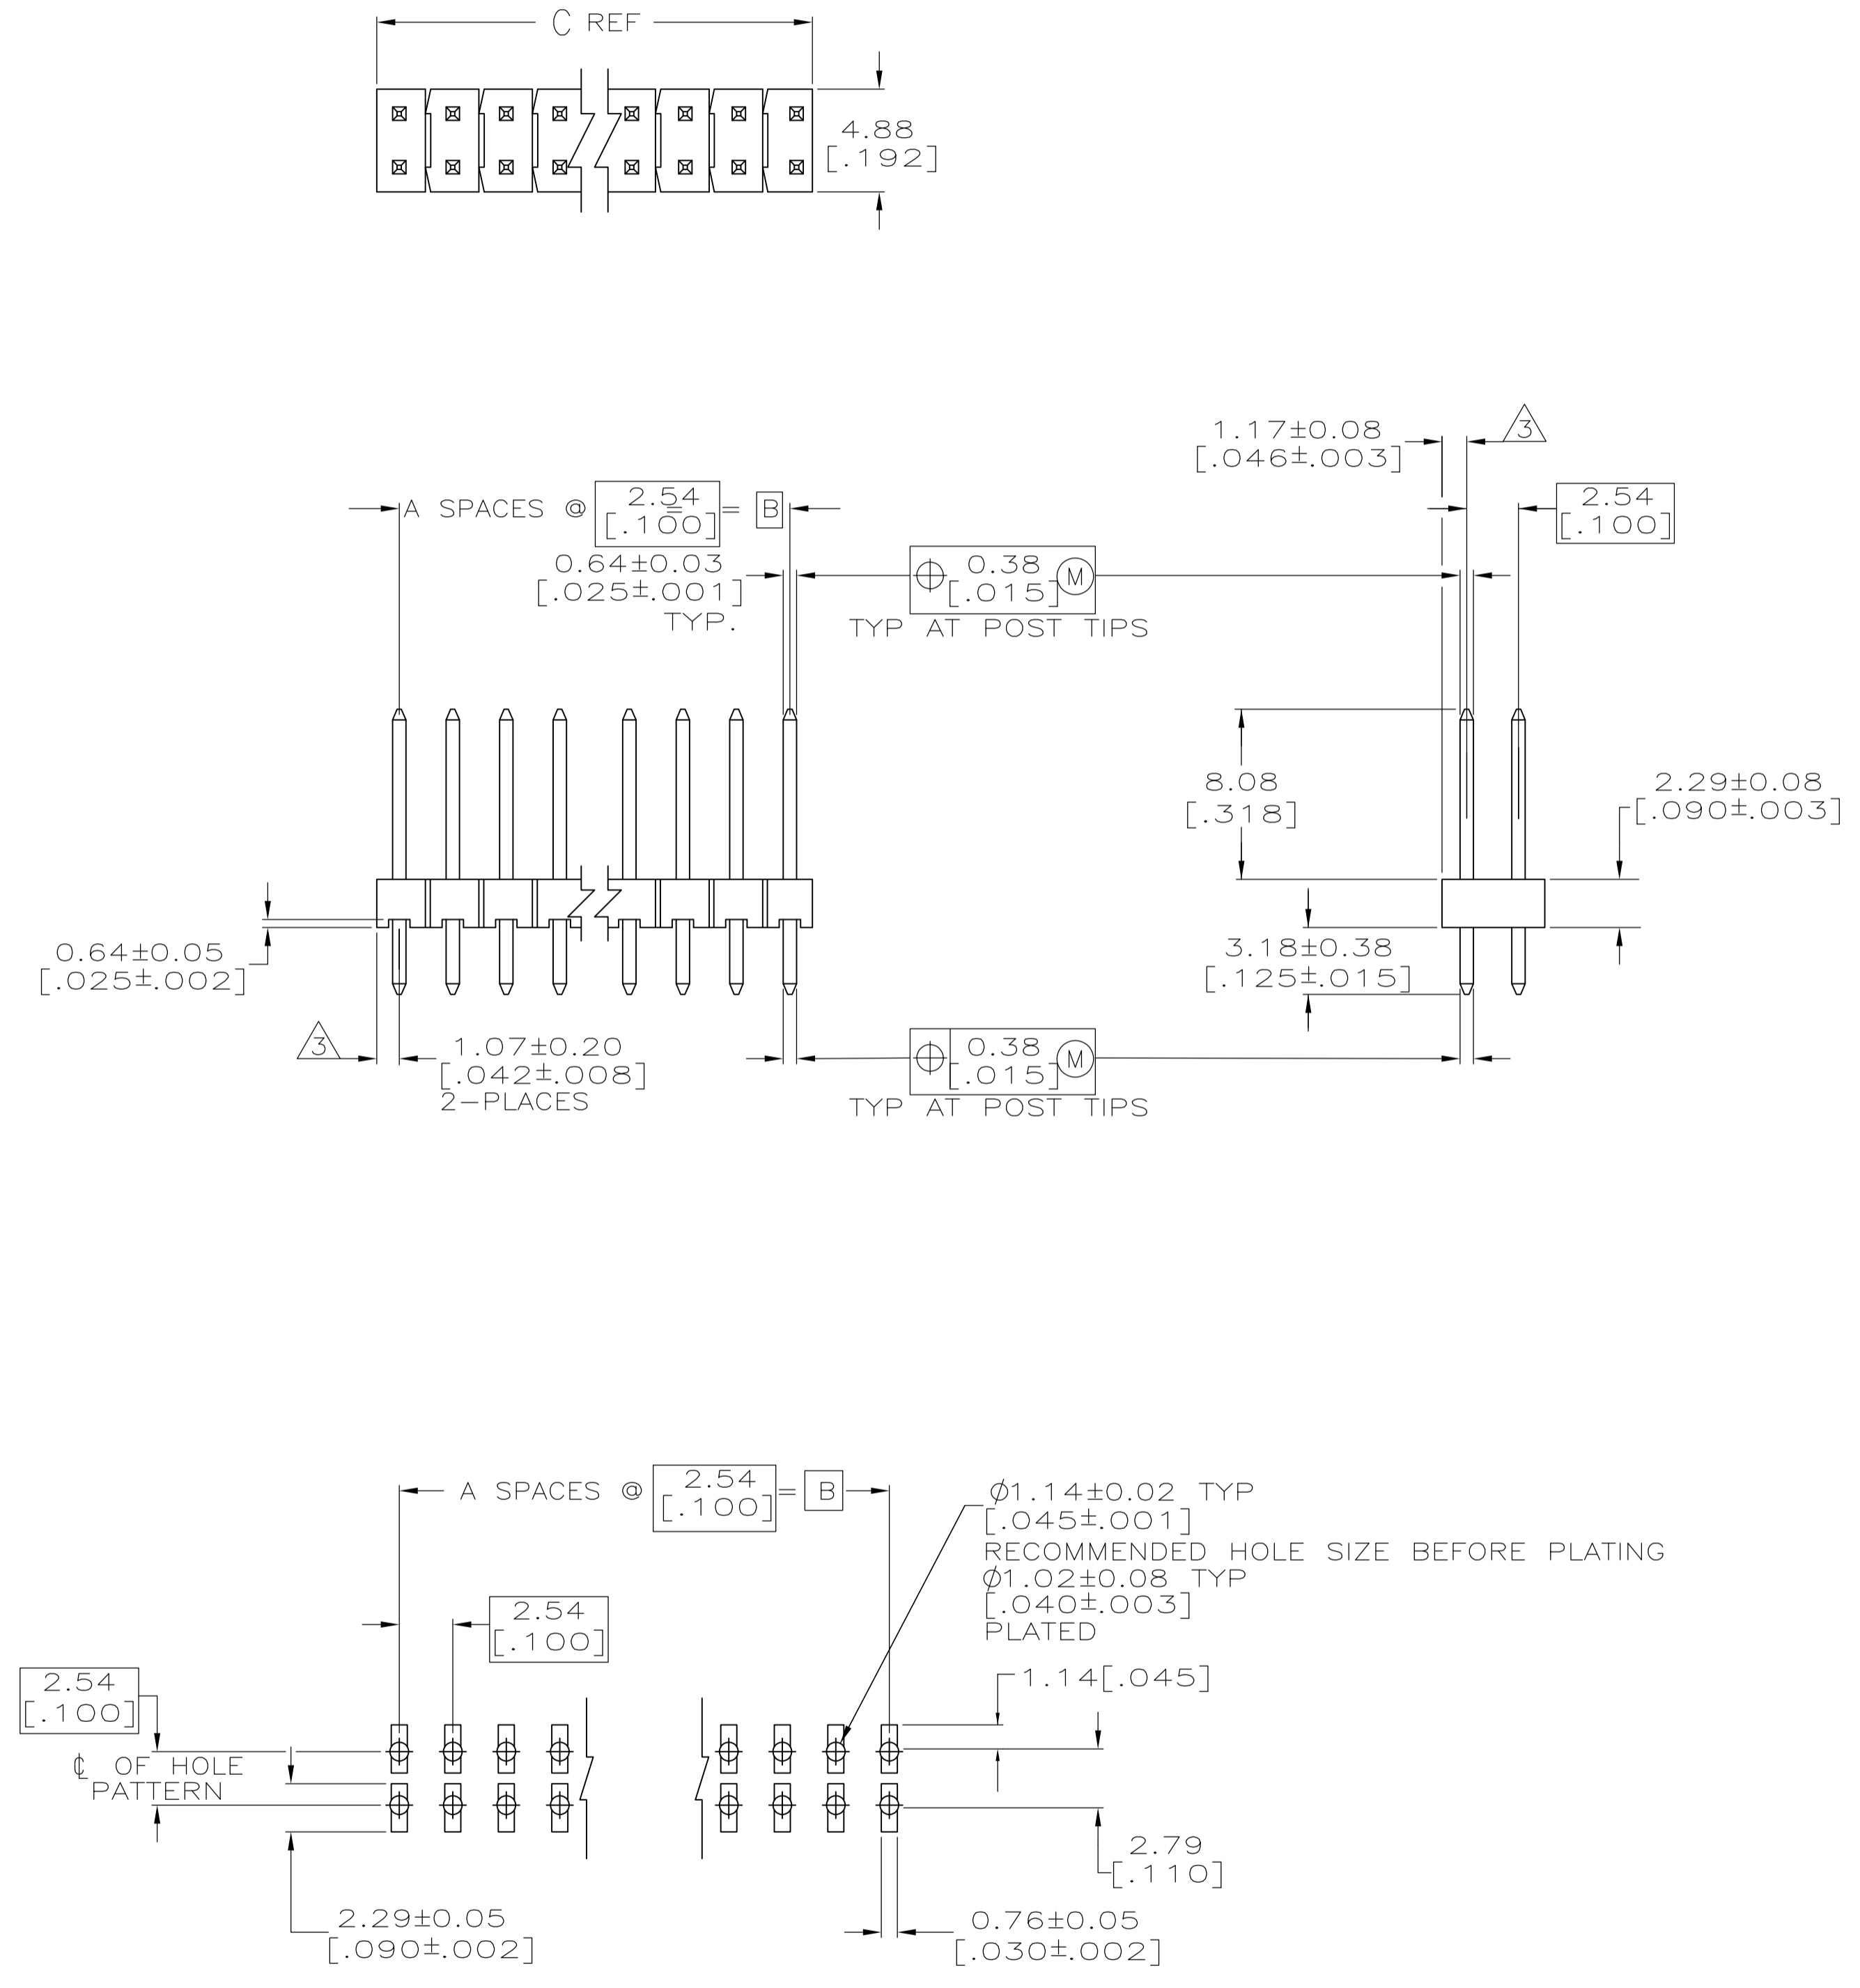

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

44mm	9.75 [0.384]	7.62 [0.300]	3	8	1571229-1
TAPE WIDTH	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN R BROWN 01FEB02		APVD J GESFORD 01FEB02		NAME		STE TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE		CAGE CODE DRAWING NO	
0 PLC ± -		1 PLC ± -		2 PLC ± 0.51[.02]		3 PLC ± 0.12[.005]		4 PLC ± 0.012[.0005]	
ANGLS ± -		FINISH		WEIGHT		A1		00779 C=1571229	
MATERIAL		FINISH		WEIGHT		A1		00779 C=1571229	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1		REV C			