

## SUMMARY

### # Wires

Low	0
High	1
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	1Y
Termination type	HV contact
IP rating	50
Cable Ø	2.20 - 2.60 mm
Matching parts	ERA.1Y.410.CLL
Status	
Alternative part	



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFA*: Straight plug with cable collet
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C27: 2.2 - 2.6 mm
Variant	

### Performance

Configuration	1Y.410 : 1 High Voltage
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	8 Amps


### Specifications

Contact Type:	Solder
Test voltage (kV DC)	15
Test voltage (kV AC)	10.5
Creepage dist. (mm):	24.5

### Others

## DRAWINGS

### Draws

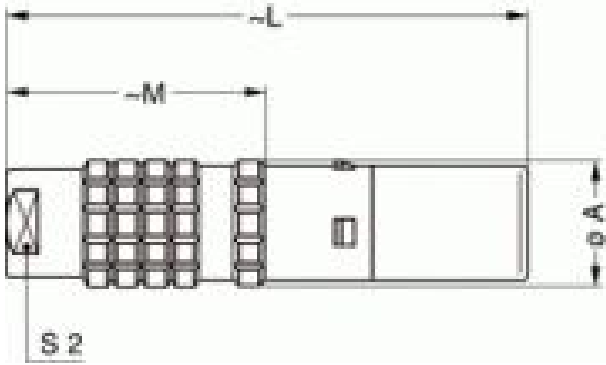

### Dimensions

	A	L	M
mm.	13	63.7	27.7
in.	0,51	2,51	1,09

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables