


Model 4814 Cable Assembly, Microwave, SMA (Male) Right Angle To SMA (Male)

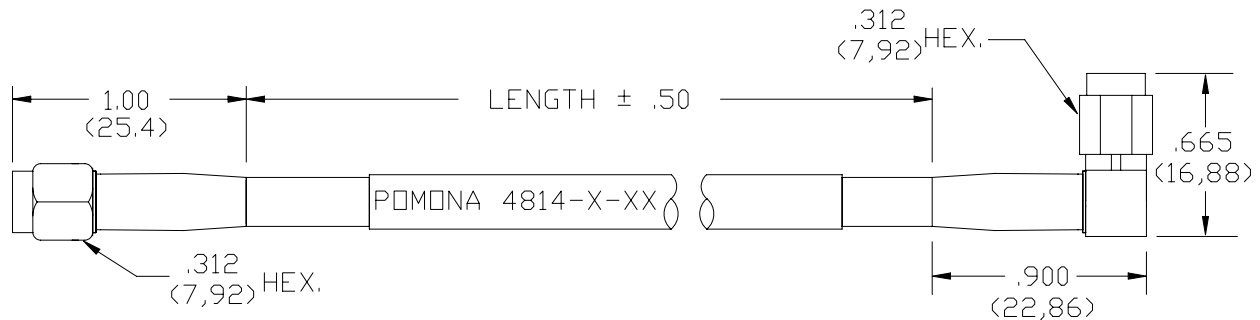

| | |
|----------------|--------------------------|
| | RG 316/U Tinted Brown |
| | 4814-BB-XX |
| Cap. pF/ft. | 29.0 |
| Nom. Imp. Ohms | 50 |
| Loss | .56 dB/ft @ 3 GHz Max. |
| Temperature | +200°C. (+392°F.) Max. |

MATERIALS:

Connectors: Right Angle SMA (Male) & SMA (Male)
 Body – Passivated Stainless Steel, Contact: Gold Plated Brass
 Dielectric – Teflon
 Finish: Contact – Hard gold plated
 Body – Nickel plated
 Cable: See Tab Block Marking: “Pomona 4814-X-XX”

RATINGS:

Operating Voltage: 335 VRMS Max.

ORDERING INFORMATION: Model 4814-BB-XX

X=Cable Type (see table)

XX = Cable Lengths, Standard Lengths: 24” (610), 48” (1219) & 60” (1524).

Additional lengths can be quoted upon request.

Ordering Example: 4814-BB-24 Indicates 24” in length.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ±.005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA