
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	
Wire Size	4 AWG	.47 R REF
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	
Wire Strip Length	1-1/8 in.	.62±.04
Stud Size	3/8 in.	.62±.04
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.36±.04 .41±.02 DIA
UL Temperature Rating	90 ° C	◄ 2.16±.06 ──
C.S.A Certified Wire Connector	Yes	
Panduit Color Code on Barrel	GRAY	 1.05±.
Panduit Die Index No. on Barrel	P29	1.031.
Alternate Industry Die Index No. () on Barrel	(8)	



CERTIFIED

LISTED Wire Connector

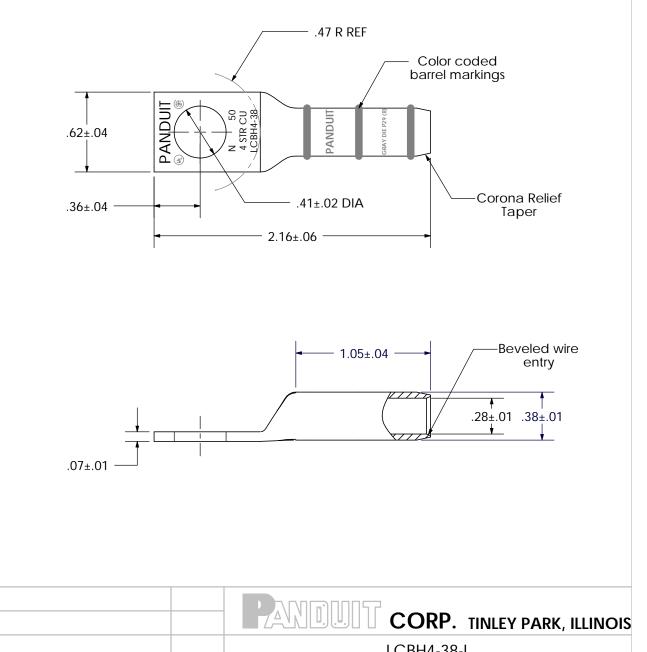

						LCBH4-38-L		
00	7/02	SAB	DRL	RELEASED	10327	Copper Lug - High Voltage, One-Hole, Long Barre		
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A	DRAWING NO / CAD FILE	LCBH4-38-CUST