

# PHOTOCOUPLER PS9313L,PS9313L2

# 1 Mbps, OPEN COLLECTOR OUTPUT TYPE, HIGH CMR, INTELLIGENT POWER MODULE DRIVE 8 mm CREEPAGE 6-PIN SDIP PHOTOCOUPLER

-NEPOC Series-

#### **DESCRIPTION**

The PS9313L and PS9313L2 are optical coupled isolators containing a GaAlAs LED on the input side and a photo diode and a signal processing circuit on the output side on one chip.

The PS9313L and PS9313L2 are specified high CMR, high CTR and pulse width distortion with operating temperature. It is suitable for IPM drive.

The PS9313L is lead bending type (Gull-wing) for surface mounting.

The PS9313L2 is lead bending type for long creepage distance (Gull-wing) for surface mount.

#### **FEATURES**


- High common mode transient immunity (CMH, CML =  $\pm 15 \text{ kV}/\mu \text{s MIN.}$ )
- Half size of 8-pin DIP
- Long creepage distance (8 mm MIN. : PS9313L2)
- High-speed response (tphl = 500 ns MAX., tplh = 750 ns MAX.)
- Maximum propagation delays (tplh tphl = 220 ns TYP.)
- Pulse width distortion ( | tphl tplh | = 220 ns TYP.)
- High isolation voltage (BV = 5 000 Vr.m.s.)
- Open collector output
- Pb-Free product
- Safety standards
  - UL approved: No. E72422
  - CSA approved: No. CA 101391 (CA5A, CAN/CSA-C22.2 60065, 60950)
  - DIN EN60747-5-2 (VDE0884 Part2) approved: No. 40024069 (Option)

#### **APPLICATIONS**

IPM Driver

<R>

General purpose inverter




#### TRUTH TABLE

LED	Output			
ON	L			
OFF	Н			


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

# PACKAGE DIMENSIONS (UNIT: mm)


## Lead Bending Type (Gull-wing) For Surface Mount

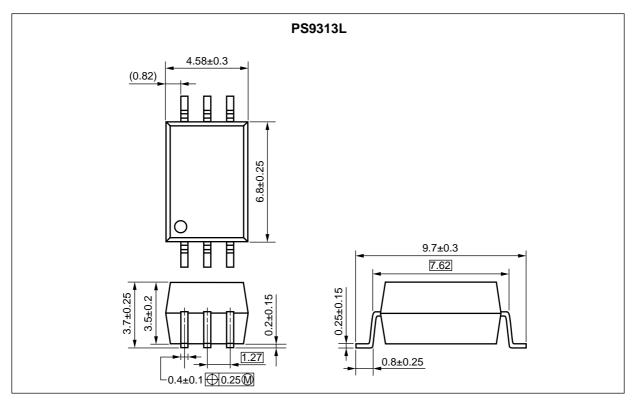

# Lead Bending Type For Long Creepage Distance (Gull-wing) For Surface Mount

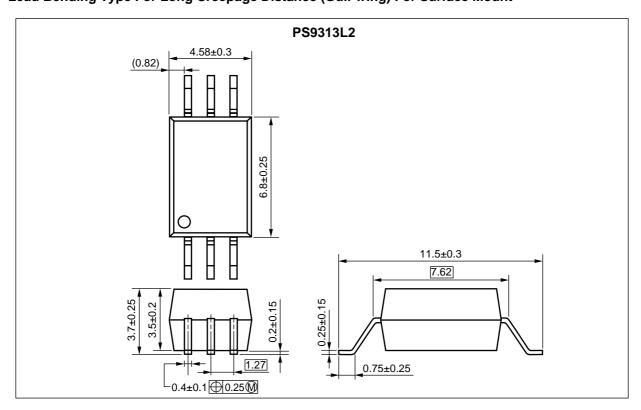

#### <R> MARKING EXAMPLE

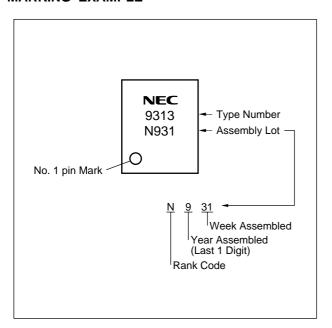

#### PHOTOCOUPLER CONSTRUCTION

Parameter	PS9313L	PS9313L2
Air Distance (MIN.)	7 mm	8 mm
Outer Creepage Distance (MIN.)	7 mm	8 mm
Isolation Distance (MIN.)	0.4 mm	0.4 mm

#### **ORDERING INFORMATION**

Part Number	Order Number	Solder Plating Specification	Packing Style	Safety Standard Approval	Application Part Number*1
PS9313L	PS9313L-AX	Pb-Free	20 pcs (Tape 20 pcs cut)	Standard products	PS9313L
PS9313L-E3	PS9313L-E3-AX	(Ni/Pd/Au)	Embossed Tape 2 000 pcs/reel	(UL, CSA approved)	
PS9313L2	PS9313L2-AX		20 pcs (Tape 20 pcs cut)		PS9313L2
PS9313L2-E3	PS9313L2-E3-AX		Embossed Tape 2 000 pcs/reel		
PS9313L-V	PS9313L-V-AX		20 pcs (Tape 20 pcs cut)	DIN EN60747-5-2	PS9313L
PS9313L-V-E3	PS9313L-V-E3-AX		Embossed Tape 2 000 pcs/reel	(VDE0884 Part2)	
PS9313L2-V	PS9313L2-V-AX		20 pcs (Tape 20 pcs cut)	Approved (Option)	PS9313L2
PS9313L2-V-E3	PS9313L2-V-E3-AX		Embossed Tape 2 000 pcs/reel		

<sup>\*1</sup> For the application of the Safety Standard, following part number should be used.

# ABSOLUTE MAXIMUM RATINGS (TA = 25°C, unless otherwise specified)

	Parameter	Symbol	Ratings	Unit
Diode	Forward Current*1	lF	25	mA
	Reverse Voltage	VR	5	V
Detector	Supply Voltage	Vcc	-0.5 to +35	V
	Output Voltage	Vo	-0.5 to +35	V
	Output Current	lo	15	mA
	Power Dissipation*2	Pc	100	mW
Isolation	Voltage <sup>*3</sup>	BV	5 000	Vr.m.s.
Operating Ambient Temperature		TA	-40 to +110	°C
Storage Temperature		T <sub>stg</sub>	-55 to +125	°C

- \*1 Reduced to 0.3 mA/°C at  $T_A = 70$ °C or more.
- \*2 Reduced to 2.0 mW/ $^{\circ}$ C at T<sub>A</sub> = 75 $^{\circ}$ C or more.
- \*3 AC voltage for 1 minute at T<sub>A</sub> = 25°C, RH = 60% between input and output. Pins 1-3 shorted together, 4-6 shorted together.


#### RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	Vcc	4.5	15	30	V
Output Voltage	Vo	0		30	V
Forward Current (ON)	IF (ON)	8		12	mA
Forward Voltage (OFF)	VF (OFF)	0		0.8	V

# <R> ELECTRICAL CHARACTERISTICS (Ta = -40 to +110°C, Vcc = 15 V, unless otherwise specified)


	Parameter	Symbol	Conditions	MIN.	TYP.*1	MAX.	Unit
Diode	Forward Voltage	VF	IF = 10 mA, T <sub>A</sub> = 25°C	1.2	1.56	1.9	V
	Reverse Current	lr	VR = 3 V, TA = 25°C			10	μА
	Terminal Capacitance	Ct	V = 0 V, f = 1 MHz		30		pF
Detector	Low Level Output Voltage	Vol	IF = 10 mA, IoL = 2.4 mA		0.13	0.6	V
	High Level Output Current	Іон	Vcc = 30 V, V <sub>F</sub> = 0.8 V		1.0	50	μА
	High Level Supply Current	Іссн	Vcc = 30 V, V <sub>F</sub> = 0.8 V, Vo = open		0.6	1.3	mA
	Low Level Supply Current	Iccl	Vcc = 30 V, I <sub>F</sub> = 10 mA, Vo = open		0.7	1.3	mA
Coupled	Threshold Input Current $(H \rightarrow L)$	IFHL	Vo = 0.8 V, Io = 0.75 mA		0.75	5.0	mA
	Current Transfer Ratio (Ic/IF)	CTR	IF = 10 mA, Vo = 0.6 V	44	110		%
	Isolation Resistance	R <sub>I-O</sub>	Vi-o = 1 kVpc	10 <sup>11</sup>			Ω
	Isolation Capacitance	Cı-o	V = 0 V, f = 1 MHz		0.7		pF
	Propagation Delay Time $(H \rightarrow L)^{*2}$	tрнL	$I_F = 10 \text{ mA}, \ R_L = 20 \text{ k}\Omega, \ C_L = 100 \text{ pF},$ $V_{THHL} = 1.5 \text{ V}, \ V_{THLH} = 2.0 \text{ V}$		240	500	ns
	Propagation Delay Time (L → H) *2	tрцн			460	750	
	Maximum Propagation Delays	tрін—tрні		-200	220	650	
	Pulse Width Distortion (PWD)	tphl-tplh			220	650	
	Common Mode Transient Immunity at High Level Output <sup>*3</sup>	СМн	$T_{A} = 25^{\circ}C, \ I_{F} = 0 \ mA, \ V_{O} > 3.0 \ V,$ $V_{CM} = 1.5 \ kV, \ R_{L} = 20 \ k\Omega,$ $C_{L} = 100 \ pF$	15			kV/μs
	Common Mode Transient Immunity at Low Level Output <sup>*3</sup>	CML	$T_{A} = 25^{\circ}\text{C}, \text{ If } = 10 \text{ mA}, \text{ Vo} < 1.0 \text{ V},$ $V_{CM} = 1.5 \text{ kV}, \text{ RL} = 20 \text{ k}\Omega,$ $C_{L} = 100 \text{ pF}$	15			kV/μs

- \*1 Typical values at  $T_A = 25^{\circ}C$ .
- \*2 Test circuit for propagation delay time

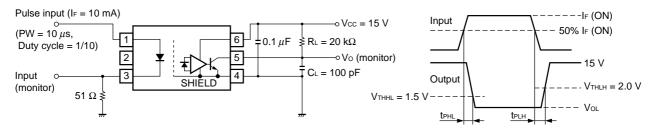

Remark CL includes probe and stray wiring capacitance.

\*3 Test circuit for common mode transient immunity

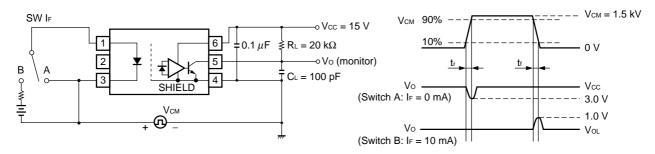


Remark CL includes probe and stray wiring capacitance.


#### **USAGE CAUTIONS**


- 1. This product is weak for static electricity by designed with high-speed integrated circuit so protect against static electricity when handling.
- 2. By-pass capacitor of more than 0.1  $\mu$ F is used between Vcc and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.
- 3. Pin 2 (which is an NC\*1 pin) can either be connected directly to the GND pin on the LED side or left open. Unconnected pins should not be used as a bypass for signals or for any other similar purpose because this may degrade the internal noise environment of the device.
  - \*1 NC: Not connected (No connection)
- 4. Avoid storage at a high temperature and high humidity.

<R>


#### <R> TYPICAL CHARACTERISTICS (TA = 25°C, unless otherwise specified)

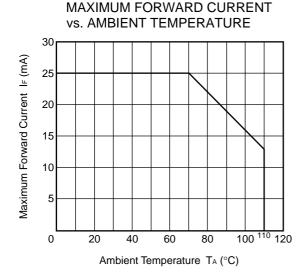




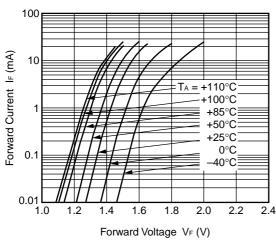


# THRESHOLD INPUT CURRENT vs. AMBIENT TEMPERATURE

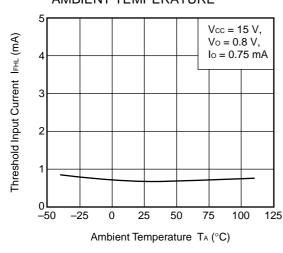


# DETECTOR POWER DISSIPATION vs. AMBIENT TEMPERATURE

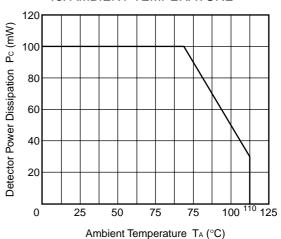


#### SUPPLY CURRENT vs. AMBIENT TEMPERATURE

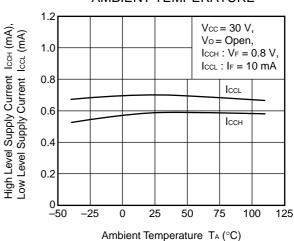

# LOW LEVEL OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE

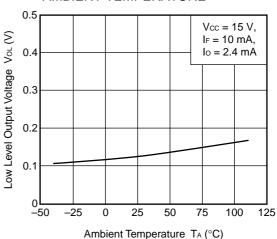


Remark The graphs indicate nominal characteristics.

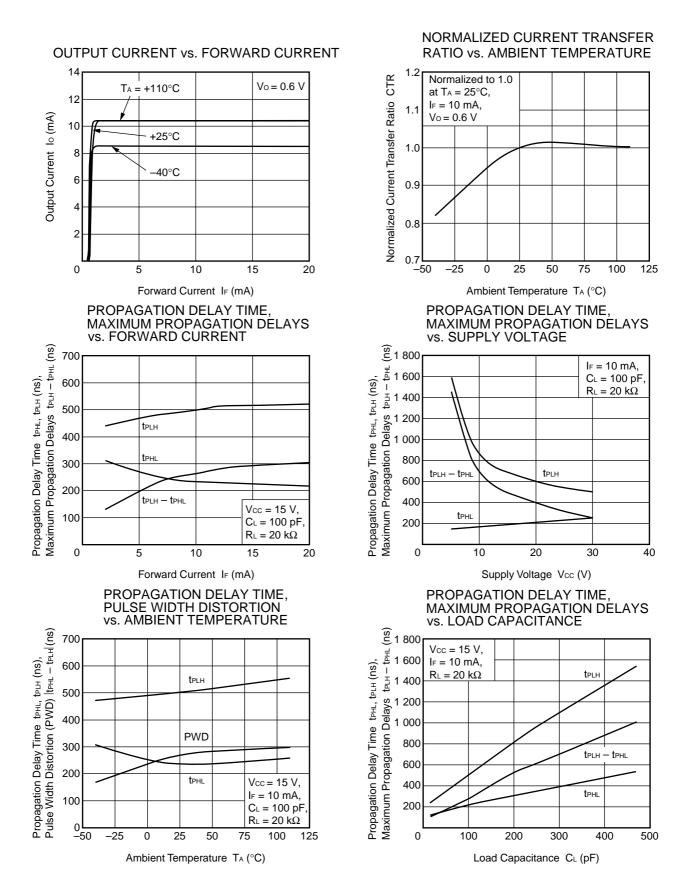


Remark The graphs indicate nominal characteristics.

#### PROPAGATION DELAY TIME, MAXIMUM PROPAGATION DELAYS vs. LOAD RESISTANCE

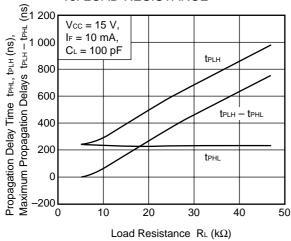



Remark The graphs indicate nominal characteristics.

#### PROPAGATION DELAY TIME, MAXIMUM PROPAGATION DELAYS vs. LOAD RESISTANCE

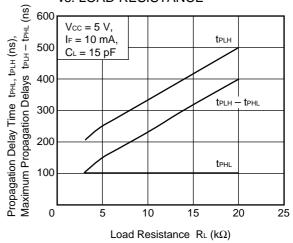


# <R> TAPING SPECIFICATIONS (UNIT: mm)

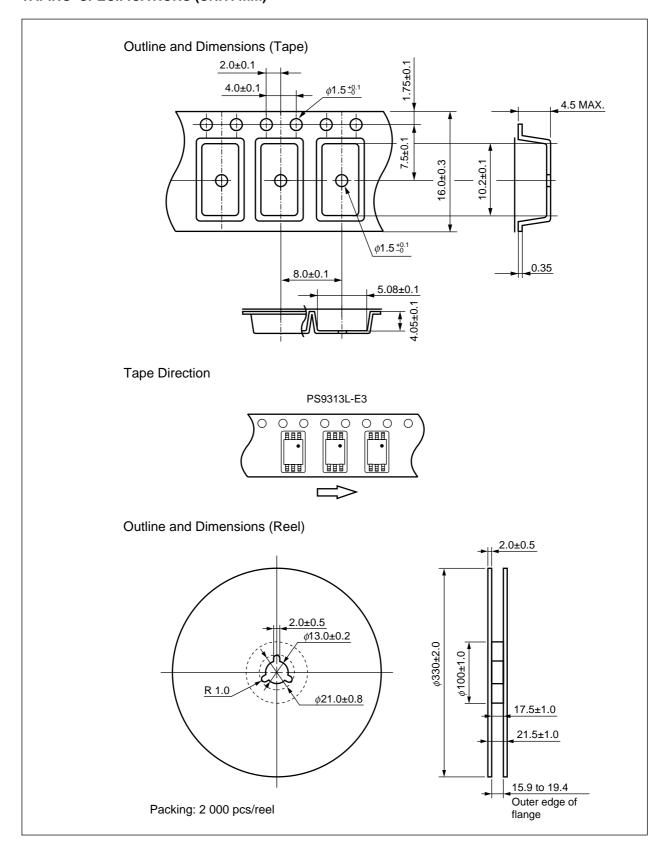

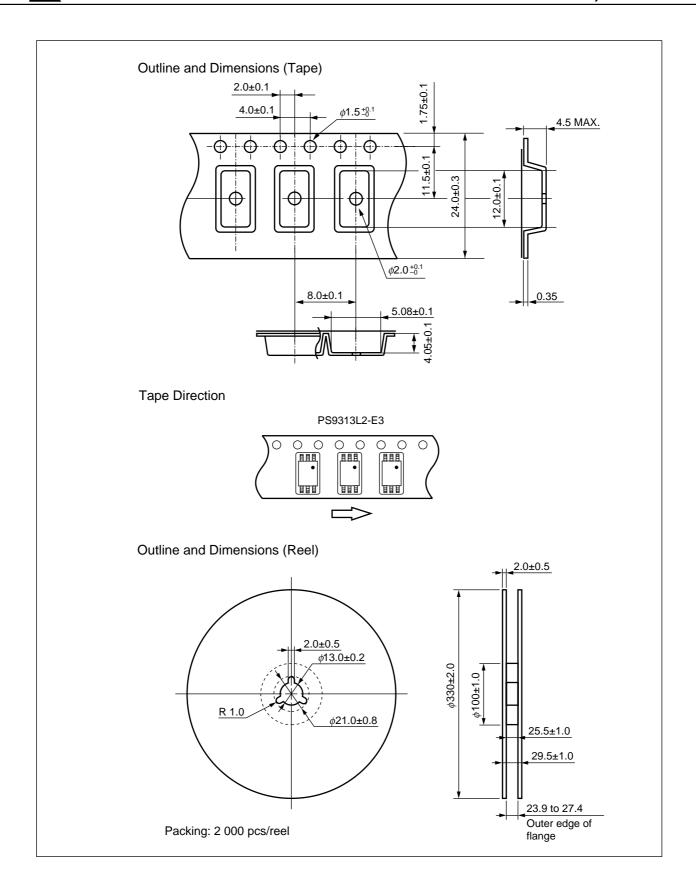

# <R> RECOMMENDED MOUNT PAD DIMENSIONS (UNIT: mm)

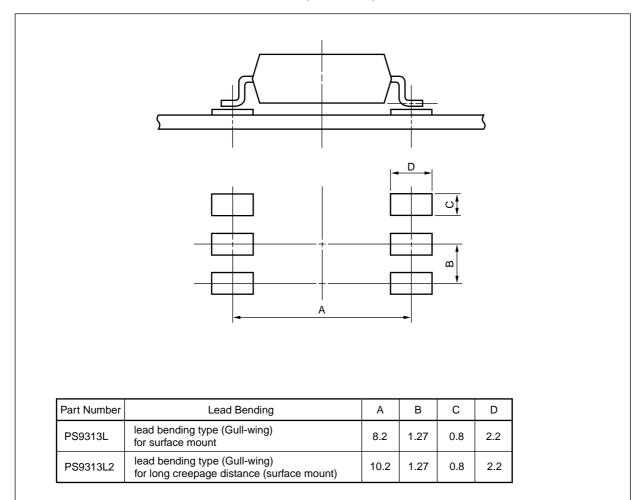

#### <R> NOTES ON HANDLING

#### 1. Recommended soldering conditions

#### (1) Infrared reflow soldering

• Peak reflow temperature 260°C or below (package surface temperature)


Time of peak reflow temperature
 Time of temperature higher than 220°C
 60 seconds or less

Time to preheat temperature from 120 to 180°C 120±30 s
 Number of reflows Three

• Flux Rosin flux containing small amount of chlorine (The flux with a

maximum chlorine content of 0.2 Wt% is recommended.)

#### Recommended Temperature Profile of Infrared Reflow

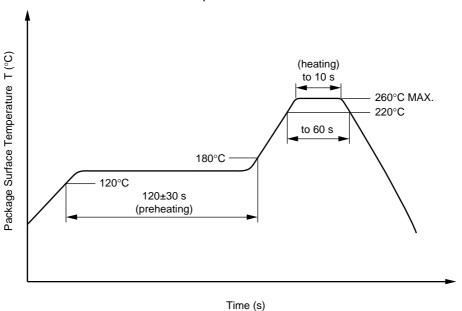

#### (2) Wave soldering

• Temperature 260°C or below (molten solder temperature)

• Time 10 seconds or less

Preheating conditions
 120°C or below (package surface temperature)

Number of times
 One (Allowed to be dipped in solder including plastic mold portion.)

• Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine

content of 0.2 Wt% is recommended.)

#### (3) Soldering by soldering iron

Peak temperature (lead part temperature) 350°C or below
 Time (each pins) 3 seconds or less

Flux
 Rosin flux containing small amount of chlorine (The flux with a

maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead.

(b) Please be sure that the temperature of the package would not be heated over 100°C.

#### (4) Cautions

• Fluxes

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

### 2. Cautions regarding noise

Be aware that when voltage is applied suddenly between the photocoupler's input and output or between collector-emitters at startup, the output side may enter the on state, even if the voltage is within the absolute maximum ratings.

# <R> SPECIFICATION OF VDE MARKS LICENSE DOCUMENT

Parameter	Symbol	Spec.	Unit
Climatic test class (IEC 60068-1/DIN EN 60068-1)		40/110/21	
Dielectric strength maximum operating isolation voltage Test voltage (partial discharge test, procedure a for type test and random test) $U_{pr} = 1.5 \times U_{IORM}, \ P_d < 5 \ pC$	Uiorm Upr	1 130 1 695	V <sub>peak</sub> V <sub>peak</sub>
Test voltage (partial discharge test, procedure b for all devices) $U_{pr}=1.875\times U_{IORM},\ P_d<5\ pC$	Upr	2 119	V <sub>peak</sub>
Highest permissible overvoltage	Utr	8 000	V <sub>peak</sub>
Degree of pollution (DIN EN 60664-1 VDE0110 Part 1)		2	
Comparative tracking index (IEC 60112/DIN EN 60112 (VDE 0303 Part 11))	СТІ	175	
Material group (DIN EN 60664-1 VDE0110 Part 1)		III a	
Storage temperature range	Tstg	-55 to +125	°C
Operating temperature range	TA	-40 to +110	°C
Isolation resistance, minimum value  VIO = 500 V dc at TA = 25°C  VIO = 500 V dc at TA MAX. at least 100°C	Ris MIN. Ris MIN.	10 <sup>12</sup> 10 <sup>11</sup>	Ω Ω
Safety maximum ratings (maximum permissible in case of fault, see thermal derating curve)  Package temperature  Current (input current IF, Psi = 0)  Power (output or total power dissipation)  Isolation resistance	Tsi Isi Psi	175 400 700	°C mA mW
Vio = 500 V dc at T <sub>A</sub> = Tsi	Ris MIN.	10 <sup>9</sup>	Ω

- The information in this document is current as of June, 2009. The information is subject to change
  without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets,
  etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or
  types are available in every country. Please check with an NEC Electronics sales representative for
  availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without the prior
  written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may
  appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative
  purposes in semiconductor product operation and application examples. The incorporation of these
  circuits, software and information in the design of a customer's equipment shall be done under the full
  responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by
  customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. In addition, NEC Electronics products are not taken measures to prevent radioactive rays in the product design. When customers use NEC Electronics products with their products, customers shall, on their own responsibility, incorporate sufficient safety measures such as redundancy, fire-containment and anti-failure features to their products in order to avoid risks of the damages to property (including public or social property) or injury (including death) to persons, as the result of defects of NEC Electronics products.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and
  "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

- "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
- "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
- "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

#### (Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

M8E0904E

#### Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
  - Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
- 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or i any way allow it to enter the mouth.