

Customer		
Description	DC FAN	
Part No.		Rev
Delta Model No.	FHB1248DHE-TXKW	Rev. <u>00</u>
Sample Issue No. Sample Issue Date.	Jan 26, 10	

	E COPY OF THIS SPECIFICATION SIGNED APPROVAL FOR PRODUC-MENT.
APPROVED BY	:
DATE	:

DELTA ELECTRONICS (THAILAND) PUBLIC COMPANY LIMITED.

111 MOO 9 WELLGROW INDUSTRIAL ESTATE BANGNA-TRAD ROAD, TAMBON BANGWUA, AMPHUR BANGPAKONG, CHACHOENGSAO 24180 THAILAND TEL. +66-(0)-38522455, FAX. +66-(0)-38522477 DELTA ELECTRONICS (THAILAND) PCL.

111 MOO 9, WELLGROW INDUSTRIAL ESTATE, TEL: +66-(0)38-522455 BANGNA-TRAD ROAD, BANGWUA, BANGPAKONG, FAX: +66-(0)38-522477

CHACHEONGSAO 24180 THAILAND.

SPECIFICATION FOR APPROVAL

\sim	4		
('11	QT.	Λm	or.
$\mathbf{v}\mathbf{u}$	ひい	נגנט	er:

Description: DC FAN

Customer P/N: REV:

Delta Model NO.: FHB1248DHE-TXKW

Sample Rev: 00 Issue NO:

Sample Issue Date: Jan 26, 10 Quantity:

1. SCOPE:

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS AXIAL FLOW FAN.

2. CHARACTERS:


ITEM	DESCRIPTION		
RATED VOLTAGE	48 VDC		
OPERATION VOLTAGE	32.0 - 80.0 VDC		
INPUT CURRENT	1.32 (MAX. 1.54) A		
INPUT POWER	63.36 (MAX. 73.92) W		
SPEED	5800±10% R.P.M.		
MAX. AIR FLOW (AT ZERO STATIC PRESSURE)	6.961 (MIN. 6.265) M ³ /MIN. 245.83 (MIN. 221.25) CFM		
MAX.AIR PRESSURE (AT ZERO AIRFLOW)	38.16 (MIN. 30.91) mmH ₂ 0 1.502 (MIN. 1.217) inchH ₂ 0		
ACOUSTICAL NOISE (AVG.)	71.5 (MAX. 75.5) dB-A		
INSULATION TYPE	UL: CLASS A		

(continued)

PART NO: DELTA MODEL: FHB1248DHE-TXKW

INSULATION STRENGTH	 10 MEG OHM MIN. AT 500 VDC (BETWEEN FRAME AND (+) TERMINAL)	
DIELECTRIC STRENGTH	5 mA MAX. AT 1000 VAC 60 Hz ONE MINUTE, (BETWEEN FRAME AND (+) TERMINAL)	
EXTERNAL COVER	OPEN TYPE	
LIFE EXPECTANCE	100,000 HOURS CONTINUOUS OPERATION AT 40 °C WITH 15 ~ 65 %RH.	
ROTATION	CLOCKWISE VIEW FROM NAME PLATE SIDE	
OVER CURRENT SHUT DOWN	THE CURRENT WILL SHUT DOWN WHEN LOCKING ROTOR	
STARTING PROTECTION	START AT LOW SPEED , AFTER 15 SEC RUNNING AT FULL SPEED	
LEAD WIRE	UL 1430 -F- AWG #22 UL 1430 -F- AWG #28 BLACK WIRE NEGATIVE (-) BLUE WIRE (F00) RED WIRE POSITIVE (+) YELLOW WIRE (PWM)	

- NOTES: 1. ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES.
 - 2. THE VALUES WRITTEN IN PARENS, (), ARE LIMITED SPEC.
 - 3. ACOUSTICAL NOISE MEASURING CONDITION:

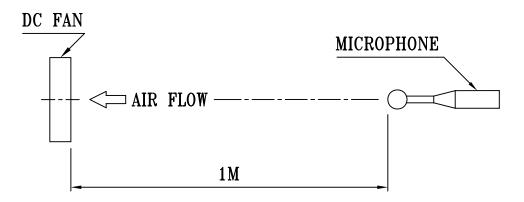

NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN ANECHOIC CHAMBER WITH B & K SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE.

> A00 page: 2

PART NO	0:						
DELTA N	MODEL: FHB1248DHE-TXKW						
3. MECH	HANICAL:						
3-1.	DIMENSIONS	SEE DI	MEN	SION	S DF	RAWI	ING
3-2.	FRAME	D	IE-0	CAST	ALU	MIN	UM
3-3.	IMPELLER		PLA	STIC	UL:	94V	7-0
3-4.	BEARING SYSTEM	Т	'WO	BALI	BEA	ARIN	1GS
3-5.	WEIGHT				490	GRA	MS
4. ENVI	RONMENTAL:						
4-1.	OPERATING TEMPERATURE	40	Т0	+80	DEG	REI	E C
4-2.	STORAGE TEMPERATURE	40	Т0	+85	DEG	REF	E C
4-3.	OPERATING HUMIDITY			5 T	0 90	%	RH
4-4.	STORAGE HUMIDITY			5 T	0 95	%	RH
5. PROT	TECTION:						
5-1.	LOCKED ROTOR PROTECTION						
	IMPEDANCE OF MOTOR WINDING PROTECTS ME HOURS OF LOCKED ROTOR CONDITION AT THE					96	
5-2.	POLARITY PROTECTION						

BE CAPABLE OF WITHSTANDING IF REVERSE CONNECTION FOR POSITIVE AND NEGATIVE LEADS.

6. RE OZONE DEPLETING SUBSTANCES:


6-1. NO CONTAINING PBBs, PBB0s, CFCs, PBBEs, PBDPEs AND HCFCs.

7. PRODUCTION LOCATION

7-1. PRODUCTS WILL BE PRODUCED IN CHINA OR THAILAND OR TAIWAN.

DELTA MODEL: FHB1248DHE-TXKW

8. P & Q CURVE:

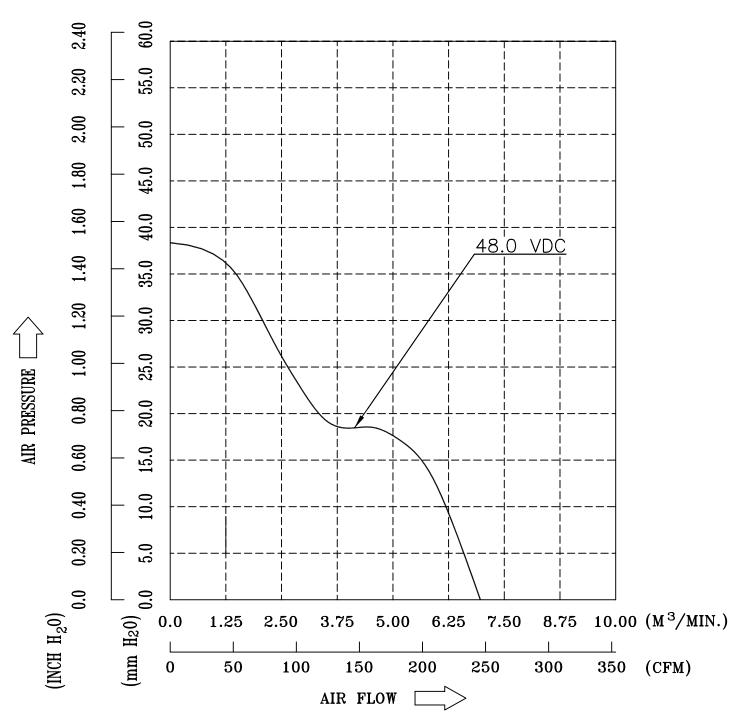

* TEST CONDITION: INPUT VOLTAGE ---- OPERATION VOLTAGE TEMPERATURE ---- ROOM TEMPERATURE HUMIDITY ----- 65%RH

DELTA MODEL: FHB1248DHE-TXKW

9. DIMENSION DRAWING:

LABEL:




OR

DC BRUSHLESS MODEL FHB1248DHE DC48V 1.54A -TXKW ELECTRONICS IN THAILA

OR

DC BRUSHLESS MODEL FHB1248DHE DC48V 1.54A -TXKW (**E SM (B**^{zp}/₂)** LELECTRONICS NADE IN TAIWAN

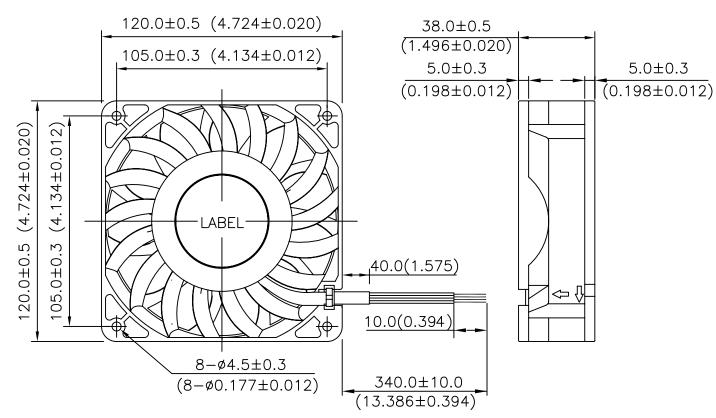

UNIT: mm(INCH)

NOTES:

1. WIRE: UL 1430 AWG#22 RED WIRE ---- (+) BLACK WIRE ---- (-) WIRE: UL 1430 AWG#28 BLUE WIRE ---- (-F00) YELLOW WIRE ---- (PWM)


2. THIS PRODUCT IS ROHS COMPLIANT

A00 page: 5

DELTA MODEL: FHB1248DHE-TXKW

10. FREQUENCY GENERATOR (FG) SIGNAL:

1. OUTPUT CIRCUIT - OPEN COLLECTOR MODE:

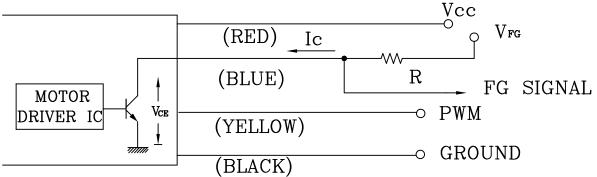

CAUTION: THE FG SIGNAL LEAD WIRE MUST BE KEPT AWAY FROM"+" LEAD WIRE & "-" LEAD WIRE.

2. SPECIFICATION:


$$V_{CE}(sat) = 0.5V MAX$$

 $V_{FG}=80.0V$ MAX

 $I_c = 10 \text{mA}$ MAX.

 $R \ge V_{FG} / I_{C}$

3. FREQUENCY GENERATOR WAVEFORM:

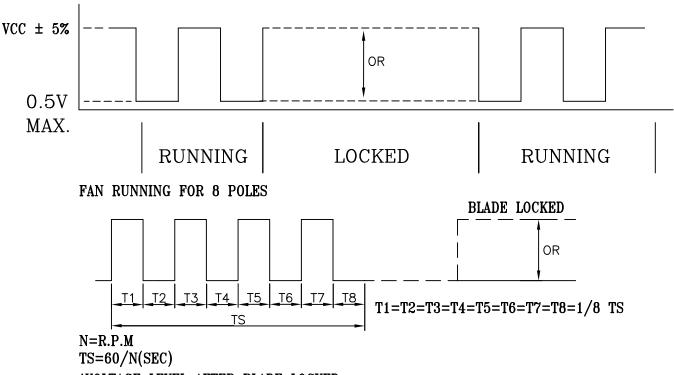

*VOLTAGE LEVEL AFTER BLADE LOCKED


*8 POLES

page: 6

DELTA MODEL: FHB1248DHE-TXKW

11. PWM CONTROL SIGNAL:

SIGNAL VOLTAGE RANGE: 0~10VDC

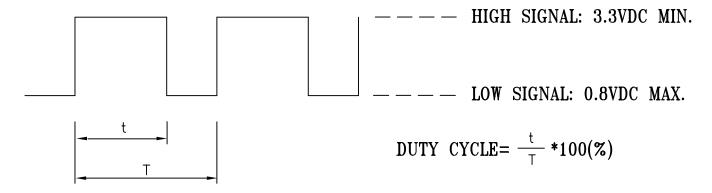

- THE FREQUENCY FOR CONTROL SIGNAL OF THE FAN SHALL BE ABLE TO ACCEPT A 30HZ~300 KHZ.
- THE PREFERRED OPERATING POINT FOR THE FAN IS 25K HZ.
- AT 100% DUTY CYCLE, THE ROTOR WILL SPIN AT MAXIMUM SPEED.
- AT 0% DUTY CYCLE, THE ROTOR WILL STOP.
- WITH CONTROL SIGNAL LEAD DISCONNECTED, THE FAN WILL STOP.
- WHEN THE ROTOR IS HALTED, IT WILL SPIN BY MORE THAN 20% DUTY CYCLE.

12. SPEED VS PWM CONTROL SIGNAL:(DC 48V F:25KHZ)

DUTY CYCLE (%)	SPEED R.P.M.		
100	5800±10%		
75	4500±10%		
50	3200±10%		
25	1850±200 R.P.M		
0	0		

page: 7 A00



Application Notice

- 1. Delta will not guarantee the performance of the products if the application condition falls outside the parameters set forth in the specification.
- 2. A written request should be submitted to Delta prior to approval if deviation from this specification is required.
- 3. Please exercise caution when handling fans. Damage may be caused when pressure is applied to the impeller, if the fans are handled by the lead wires, or if the fan was hard-dropped to the production floor.
- 4. Except as pertains to some special designs, there is no guarantee that the products will be free from any such safety problems or failures as caused by the introduction of powder, droplets of water or encroachment of insect into the hub.
- 5. The above-mentioned conditions are representative of some unique examples and viewed as the first point of reference prior to all other information.
- 6. It is very important to establish the correct polarity before connecting the fan to the power source. Positive (+) and Negative (-). Damage may be caused to the fans if connection is with reverse polarity, if there is no foolproof method to protect against such error specifically mentioned in this spec.
- 7. Delta fans without special protection are not suitable where any corrosive fluids are introduced to their environment.
- 8. Please ensure all fans are stored according to the storage temperature limits specified. Do not store fans in a high humidity environment. We highly recommend performance testing is conducted before shipping, if the fans have been stored over 6 months.
- 9. Not all fans are provided with the Lock Rotor Protection feature. If you impair the rotation of the impeller for the fans that do not have this function, the performance of those fans will lead to failure.
- 10. Please be cautious when mounting the fan. Incorrect mounting of fans may cause excess resonance, vibration and subsequent noise.
- 11. It is important to consider safety when testing the fans. A suitable fan guard should be fitted to the fan to guard against any potential for personal injury.
- 12. Except where specifically stated, all tests are carried out at room (ambient) temperature and relative humidity conditions of 25°C, 65% RH. The test value is only for fan performance itself.
- 13. Be certain to connect an " $4.7\mu F$ or greater" capacitor to the fan externally when the application calls for using multiple fans in parallel, to avoid any unstable power.

Doc. No: FMBG-ES Form 001 Rev. 01 Date: June 24, 2009