

Plate & Filament 260 Series

Universal Primary & 50/60 Hz. Operation








Features

- Universal primary with taps for 100, 120, 220 or 240 VAC, 50/60 Hz.
- Designed for preamps, low power amps, general replacement, test equipment, etc.
- Economical, open frame, chassis mount two hole (.187 dia. = G) channel bracket (figure #1) or four hole mounting (figure #2).
- Units include a Faraday shield between the primary and secondary windings. Our electrostatic shield reduces the capacitive coupling from the primary - greatly attenuating higher frequency current coupling to the secondaries.
- Minimum 5" long leads.
- For more selection check out our **300 Series** of universal plate & filament transformers.

NOTES

- 1. These units are designed to run with BOTH primary windings energized for maximum efficiency (see wiring table below).
- 2. The Faraday shield lead the gray wire marked SH (shield) above, should remain grounded to the mounting bracket & in turn to the chassis.

Gallery

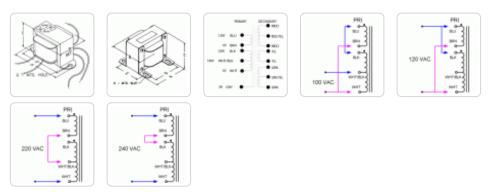

		A.C. High Voltage	A.C. Filament	A.C. Filament	Figure #							
		Secondary #1	Secondary #2	Secondary #3	or PDF	Dimensions						
Part No.	VA	RMS	RMS	RMS	File	Α	В	С	D	Е	G	
260A	22	400V C.T. @ 40ma.	6.3V C.T. @ 1A	-	1	3.25	2.00	2.00	2.81	-	0.19	
260A6	57	740V C.T. @ 60ma.	6.3V C.T. @ 2A	-	See PDF	-	-	-	-	-	-	
260C	65	500V C.T @ 85ma	5V @ 2A	6.3V C.T. @ 2A	1	4.03	2.65	2.62	3.56	-	0.19	
260E	80	450V C.T. @ 115ma.	5V @ 2A	6.3V C.T. @ 3A	See PDF	3.00	3.06	2.53	2.50	2.40	0.21 x 0.38	
260G	175	550V C.T. @ 230ma.	5V @ 3A	6.3V C.T. @ 5A	See PDF	3.75	3.50	3.13	3.25	3.25	0.20 x 0.38	
260J	152	650V C.T. @ 173ma.	5V @ 2A	6.3V C.T. @ 4A	2	3.75	3.13	3.13	3.12	2.75	0.22 x 0.56	
260K	197	650V C.T. @ 230ma.	5V @ 3A	6.3V C.T. @ 5A	2	4.50	3.25	3.75	3.75	3.00	0.22 x 0.56	

		A.C. High Voltage Secondary #1	A.C. Filament Secondary #2	A.C. Filament Secondary #3	Figure # or PDF	Dimensions								
Part No.	VA	RMS	RMS	RMS	File	Α	В	С	D	Е		G		
260M	248	700V C.T. @ 288ma.	5V @ 3A	6.3V C.T. @ 5A	2	4.50	3.25	3.75	3.75	3.00	0.22	Х	0.56	

Data subject to change without notice

© 2017. Hammond Manufacturing Ltd. All rights reserved.